

DA180 Series

Basic AC Servo Drive



Introduction

DA180 series basic AC servo drive is the new generation of INVT simplified single-axis servo product.

Utility oriented, DA180 focuses on the essential of manufacturing, achieving quick need response and making expansion easy.

It provides efficient and competitive solutions for the intelligentization, simplification, networking, and high-performance requirements of general-purpose equipment.



Features



High speed response(up to 2.0kHz)



Enriched communication interfaces
Support EtherCAT CANopen and Modbus fieldbus



Light and handy
Compared with DA200, DA180 can maximum reduce the size by 45%



Environmental adaptability
Models($\leq 400W$) adapts natural cooling





Accurate positioning
17-bit absolute encoder



Low frequency vibration control
Effectively suppresses low frequency mechanical resonance and long swing-arm end oscillation, boosts the rotation efficiency and speeding up operation

Applications

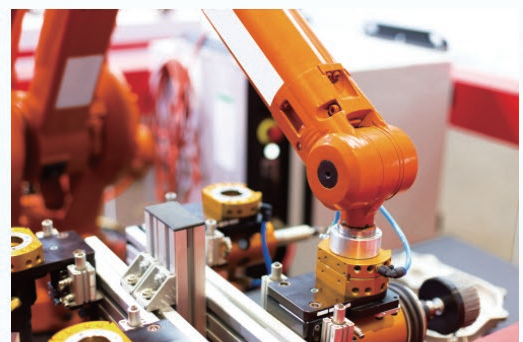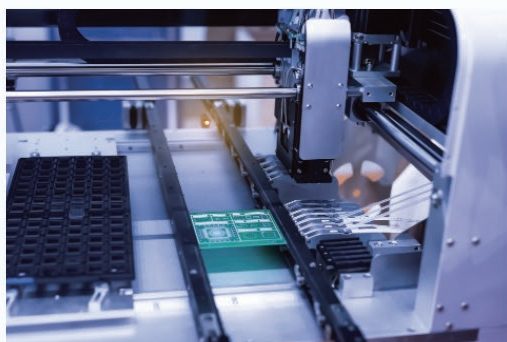

Model Selection

DA180 - S 2R8 S G 0

① ② ③ ④ ⑤ ⑥

Symbol	No.	Item	Description
DA180	①	Product category	DA180: Servo drive series
S	②	Voltage class	S: 220V T: 400V
2R8	③	Rated output current	1R3: 1.3A 4R5: 4.5A 1R8: 1.8A 5R0: 5.0A 2R8: 2.8A 7R6: 7.6A 3R5: 3.5A 010: 10A
S	④	Communication type	S: Supporting RS485 N: EtherCAT C: CANopen
G	⑤	Function type	G: Basic type
0	⑥	Encoder type	0: Absolute

Power Ratings

Drive model	Input		Output		Frame size
	Voltage (V)	Rated current (A)	Power (kW)	Rated current(A)	
DA180-S1R3□G0	1PH 220V	0.9	0.1	1.3	A
DA180-S1R8□G0	1PH 220V	1.8	0.2	1.8	A
DA180-S2R8□G0	1PH 220V	3.6	0.4	2.8	A
DA180-S4R5□G0	1PH 220V	6.8	0.75	4.5	B
DA180-S5R0□G0	1PH 220V	9.1	1.0	5	B
DA180-S7R6□G0	3PH 220V	5.6	1.5	7.6	C
DA180-S010□G0	3PH 220V	7.5	2.0	10	C
DA180-T3R5□G0	3PH400V	2.1	1.0	3.5	C
DA180-T4R5□G0	3PH400V	3.1	1.5	4.5	C


Brake Resistor

Drive model	Built-in brake resistor specifications	Min. allowed resistance of external brake resistor
DA180-S1R3□G0	/	60Ω
DA180-S1R8□G0	/	60Ω
DA180-S2R8□G0	/	60Ω
DA180-S4R5□G0	45Ω/60W	45Ω
DA180-S5R0□G0	45Ω/60W	45Ω
DA180-S7R6□G0	30Ω/60W	20Ω
DA180-S010□G0	30Ω/60W	20Ω
DA180-T3R5□G0	60Ω/60W	60Ω
DA180-T4R5□G0	60Ω/60W	60Ω

EMI Filter

Drive model	EMI filter model
DA180-S1R3□G0	FLT-P04006L-B
DA180-S1R8□G0	
DA180-S2R8□G0	
DA180-S4R5□G0	FLT-P04016L-B
DA180-S5R0□G0	
DA180-S7R6□G0	
DA180-S010□G0	
DA180-T3R5□G0	FLT-P04006L-B
DA180-T4R5□G0	

Servo Drive Sizes

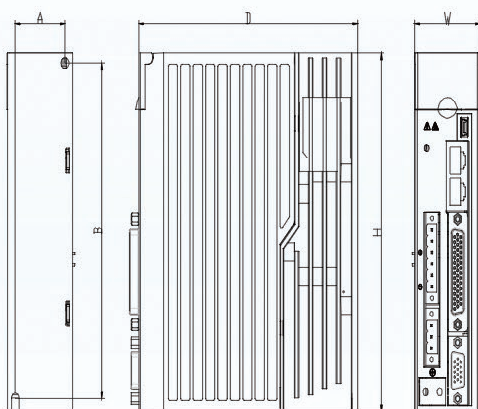

Frame	Drive model	Outline dimensions			Installation dimensions		Installation hole
		H	W	D	A	B	
A	DA180-S1R3□G0	160	42	141	32	150	M4(Φ5)
	DA180-S1R8□G0						
	DA180-S2R8□G0						
B	DA180-S4R5□G0	160	50	141	40	150	M4(Φ5)
	DA180-S5R0□G0						
C	DA180-S7R6□G0	170	68	180	54	161	M4(Φ5)
	DA180-S010□G0						
	DA180-T3R5□G0						
	DA180-T4R5□G0						

unit:mm

Servo Drive Technical Parameters

DA180 series servo drive					
Specifications		Description			
Power	220V system input voltage 400V system input voltage	1/3PH,AC 220V(±15%),47-63Hz 3PH,AC 400V(±15%),47-63Hz			
Port	Control signal	Input	Ten channels of input (the functions can be set through related parameters)		
		Output	Four channels of output (the functions can be set through related parameters)		
	Analog	Input	Two channels of 12-bit analog input		
	Pulse signal	Input	One group of input (in differential or open collector mode)		
		Output	One group of output (in differential mode, A+, A-; B+, B-; Z+, Z-)		
	Communication	USB	1:1 communication upper PC software		
		RS485	1:n communication		
		CANopen	1:n communication (optional configuration)		
EtherCAT		1:n communication (optional configuration)			
Control mode		1. Position control; 2. Speed control; 3. Torque control; 4. Position/speed mode switching; 5. Speed/torque mode switching; 6. Position/torque mode switching; 7. CANopen mode;			
Function	Position control	Control input	1. Residual pulse clearing; 2. Command pulse input disabling; 3. Electronic gear ratio switching; 4. Vibration control switching		
		Control output	Such as positioning completion output		
		Pulse input	Max. pulse input frequency	Photoelectric coupling: differential input 4Mpps, open collector input 200kpps	
			Pulse input mode	1. Pulse+direction; 2. CW+CCW; 3. Quadrature encoding	
			Electronic gear	1/10000 ~ 1000	
			Filter	1. Command smoothing filter; 2. FIR filter	
		Analog input	Torque limit input	Able to perform clockwise/anticlockwise torque limit separately	
		Vibration control	Able to control 5~200Hz front-end vibration and overall vibration		
	Pulse output	1. Able to perform any frequency division setting below the encoder resolution 2. Capable of the B-phase reversing function			
	Speed control	Input control	1. Internal command speed selection 1; 2. Internal command speed selection 2; 3. Internal command speed selection 3; 4. Zero speed clamping		
			Output control	Such as speed reaching	
		Analog input	Speed command input	Able to enable speed command input after related settings are made based on analog voltage DC±10V	
			Torque limit input	Able to enable separate clockwise/anticlockwise torque limit	
		Internal speed command	Able to switch between internal 8-step speeds based on external input control		
		Speed command ACC/Dec adjustment	Able to set ACC/Dec time separately or make S-curve ACC/Dec settings		
		Zero speed clamping	Delay filter for analog input speed commands		
		Speed command filter	Able to perform zero drift control on external interference		
	Torque control	Input control	Such as zero speed clamping input		
			Output control	Such as speed reaching	
		Analog input	Torque command input	Support for gain and polarity settings based on analog voltage	
Speed limit input			Support for analog speed limit		
Speed limit		Able to set speed limit through parameters			

Servo Drive Technical Parameters

DA180 series servo drive			
Specifications			Description
Function	Torque control	Torque command filter	Delay filter for analog input torque commands
		Torque command zero drift control	Able to perform zero drift control on external interference
	Internal position planning	Point planning	Support for 128-segment internal position setting and communication-controlled positioning
		Route setting	1. Position; 2. Speed; 3. ACC time; 4. Dec time; 5. Stop timer; 6. Various state output; 7. Running mode
		Homing	1. LS signal; 2. Z-phase signal; 3. LS signal + Z-phase signal; 4. Torque limit signal;
Protection	Hardware protection		Protection against faults such as overvoltage, undervoltage, overcurrent, overspeed, overload, brake resistor overload, and encoder fault
			Such as protection against ROM fault, initialization fault, I/O distribution exception, drive overheating, and excessive position deviation
	Fault records		1. A total of ten faults can be recorded. 2. Key parameters can be recorded when a fault occurs.
Environment	Temperature	Working temperature	0–45°C
		Storage temperature	-20–80°C (no freezing)
	Working/storage RH		≤90% RH (no condensation)
	IP rating		IP20
	Altitude		Below 1000 meters
	Vibration		≤5.88m/s ² , 10–60Hz (Do not work at the resonance point)

Servo Motor Technical Parameters

Motor model (17-bit single-turn magnetic encoder)	Rated power (kW)	Rated current (A)	Max. momentary current (A)	Rated torque (Nm)	Max. momentary torque (Nm)	Rated speed (rpm)	Max. speed (rpm)	Rotation inertia without/with Electromagnetic brake(kg.cm ²)	Voltage (V)	Weight without/with Electromagnetic brake (kg)	
ML series with small inertia											
SV-ML06-0R2G-2-SA□	0.2	1.5	4.5	0.64	1.92	3000	5000	0.198/0.21	220	1.4/1.6	
SV-ML06-0R4G-2-SA□	0.4	2.8	8.4	1.3	3.9			0.33/0.34		1.8/2.0	
SV-ML08-0R7G-2-SA□	0.75	4.5	13.5	2.4	7.2			1.28/1.41		3.0/3.5	
MM/SM series with medium inertia											
SV-MM13-1R0E-2-SA□	1	4.8	14.4	4.78	14.3	2000	2750	6.4/7.19	220	5.8/7.5	
SV-MM13-1R5E-2-SA□	1.5	7.6	22.8	7.16	21.4			2800		9.3/10.09	7.1/8.8
SV-MM13-2R0E-2-SA□	2	9.5	28.5	9.55	28.6			2850		12.2/12.99	8.4/10.1
SV-MM13-1R0E-4-SA□	1	2.8	8.4	4.78	14.3	2000	2650	6.39/8.29	400	5.8/7.5	
SV-MM13-1R5E-4-SA□	1.5	4.5	13.5	7.16	21.4			2950		9.23/11.13	7.1/8.8
Insulation class	Class F (155°C)										
IP rating	IP65										
Ambient environment	Temperature: -20°C ~ +40°C (no freezing); RH: Below 90%RH (no condensation)										

Your trusted industry automation solution provider



Service line: 86-755-23535967 E-mail: overseas@invt.com.cn Website: www.invt.com

SHENZHEN INVT ELECTRIC CO.,LTD. INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China

- Industrial Automation:**
- HMI
 - PLC
 - VFD
 - Servo System
 - Elevator Intelligent Control System
 - Rail Transit Traction System
- Electric Power:**
- UPS
 - DCIM
 - Solar Inverter
 - New Energy Vehicle Powertrain System
 - New Energy Vehicle Charging System
 - New Energy Vehicle Motor

INVT Copyright.
Information may be subject to change without notice during product improving.

66003-00210 20220406(V4.1)