


# TS600 Series Intelligent PLC



# About Us



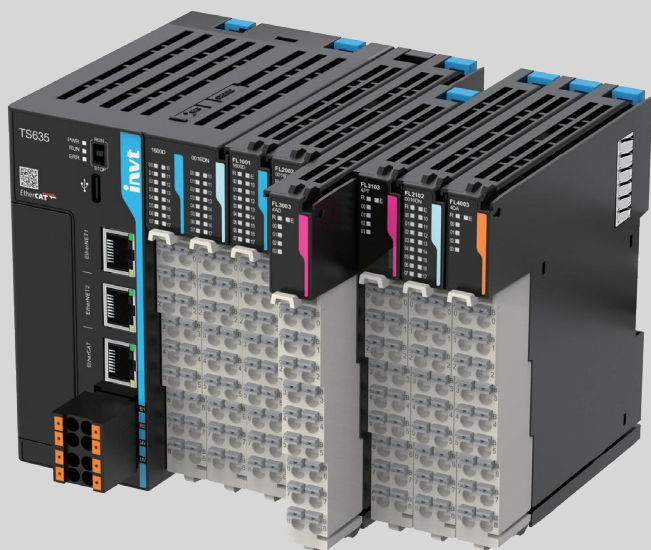

INVT (Shenzhen INVT Electric Co., Ltd) has been concentrating on industry automation and energy power since its foundation in 2002 and is committed to "Providing the best product and service to allow customers more competitiveness". INVT goes public in 2010 and is the first A-share listed company (002334) in Shenzhen Stock Exchange in the industry. At present, INVT owns 15 subsidiaries and more than 4500 employees, over 40 branches, forming a sales network covering more than 100 overseas countries and regions.

**INVT has been awarded as the Key High-tech Enterprise of National Torch Plan based on mastering of key technologies in power electronics, auto control and IT. With business covering industry automation, electric vehicle, network power and rail transit, INVT has established 10 R&D centers nationwide, boasts more than 1400 patents and owns the first lab in the industry awarded ACT qualification from TÜV SÜD, UL-WTDP and CNAS National Lab. The industrial parks in Shenzhen and Suzhou aim to provide customers with advanced integrated product development design management, comprehensive product R&D test and auto informational production. The worldwide INVT branches and warranty service centers are ready to offer customers all-around back-ups including professional solutions, technical trainings and service support.**

In the next decade, INVT will continue to take " Sincere Virtuous, Professional Aspiring" as our business philosophy, enhance core business sectors including industrial automation, electric vehicle, network power and rail transit based on the three major technologies in industry automation and energy power fields, and strive to become a leading, responsible and harmonic international professional group armed with proper product structure, leading technologies, efficient management, robust profitability and superior competitiveness.



# TS600 Series Intelligent PLC


## Product overview

INVT TS600 series intelligent PLC integrates high-performance embedding technology, and it is based on a high-speed bus system architecture to integrate four types of automation control, namely, sequence, process, information, and motion control, into the same system. It achieves the real-time control and complex calculation through the highly reliable software and hardware real-time system, and provides open communication interfaces, IoT networks, and distributed module system architecture. The completely independent programming software provides customized services, making programming easy.

TS600 can work with INVT VFD, servo, HMI, IoT and other products to construct one-stop automation solutions to create value for customers.



## Product positioning

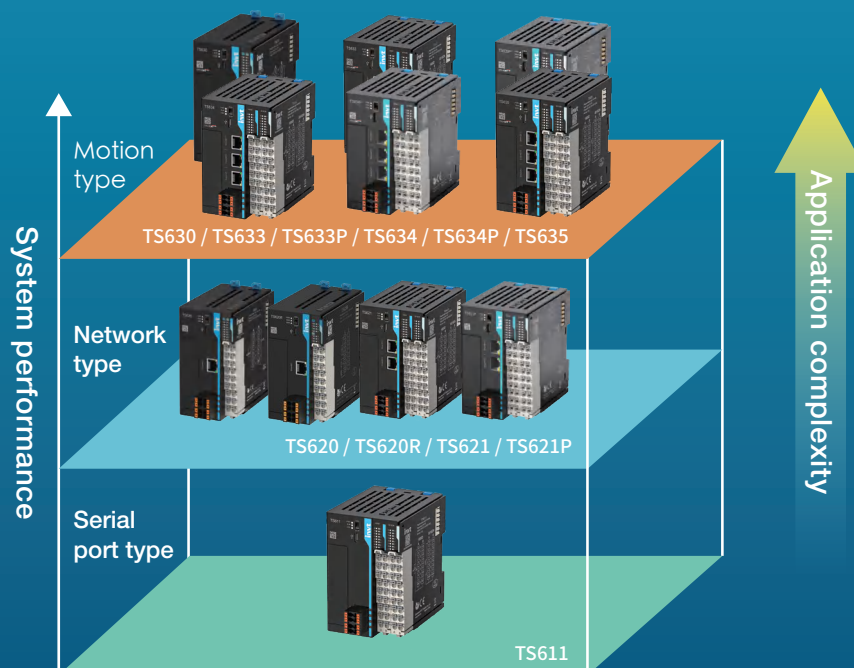





# High performance

## Running efficiently

1G main frequency, compile command breakthrough, bit operation speeding up to **0.01μs**

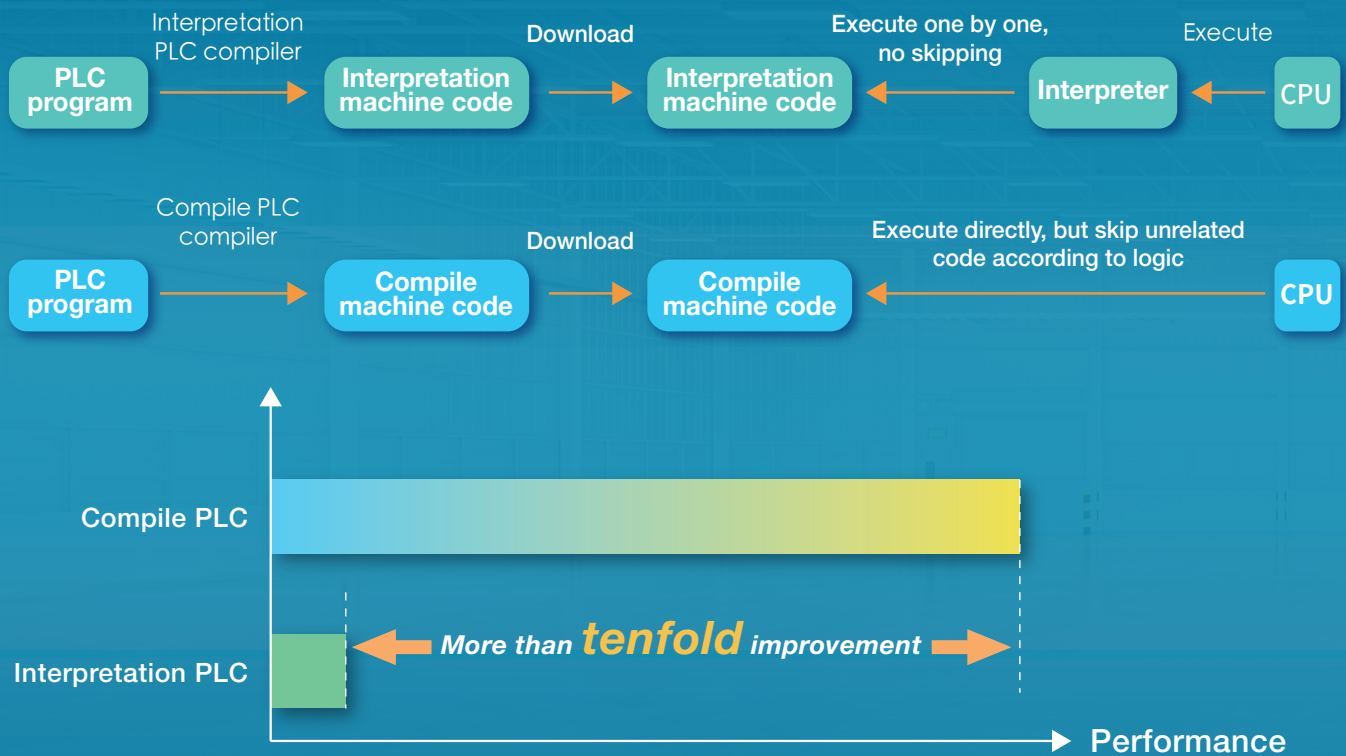


**100Mbps** backplane bus; **125μs** IO refresh speed; **plating process**, reliable connection; **saving data at power down**, 1s power-down ride-through

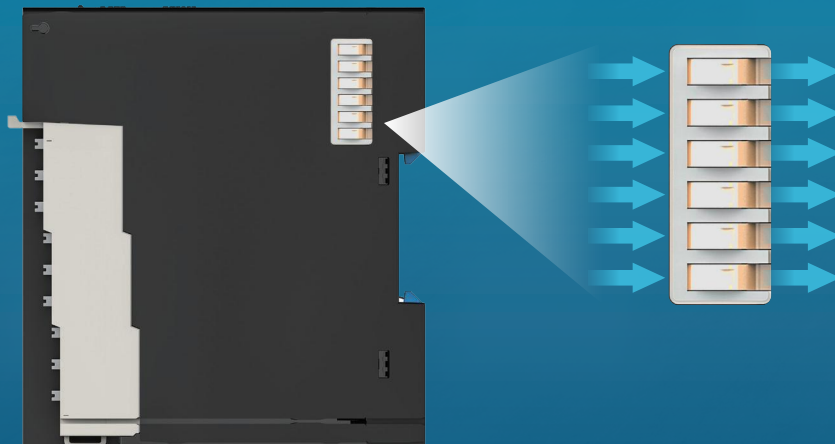



# Strong motion control

- High-speed motion control, easily implementing complex processes

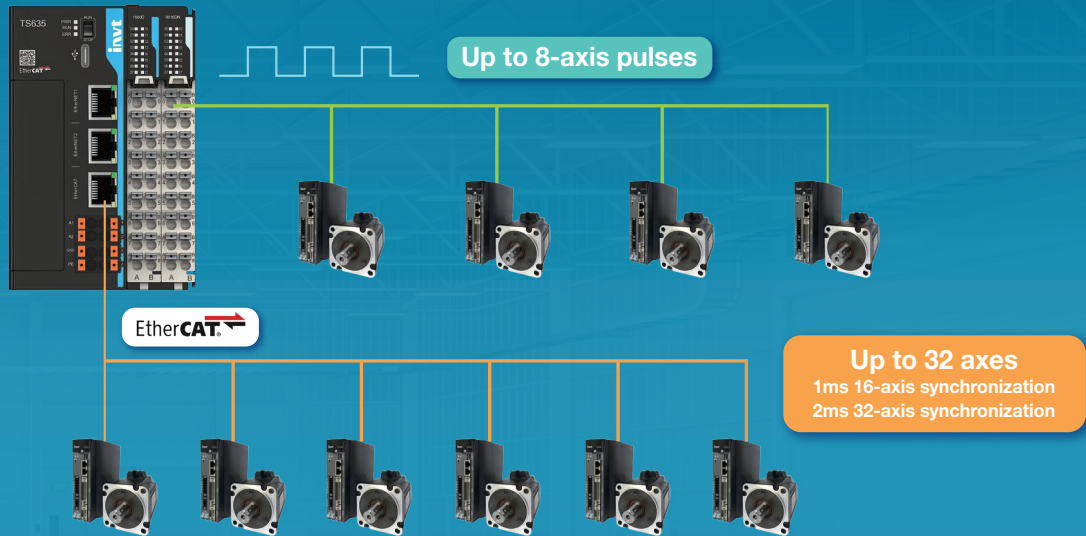

## Single-axis control

speed and torque control



Position control



Homing




## Multi-axis control

E-gear



E-CAM




Interpolation



## Flying shear



## Chasing shear



```


mirror_mod.use_y = True
mirror_mod.use_z = False
elif_operation == "MIRROR_Z":
    mirror_mod.use_x = False
    mirror_mod.use_y = False
    mirror_mod.use_z = True

```

# Easy connection

## Multi-protocol support facilitates interconnection

**Dual-port design**, makes cascading easy, and achieves the isolation between the internal network and external network

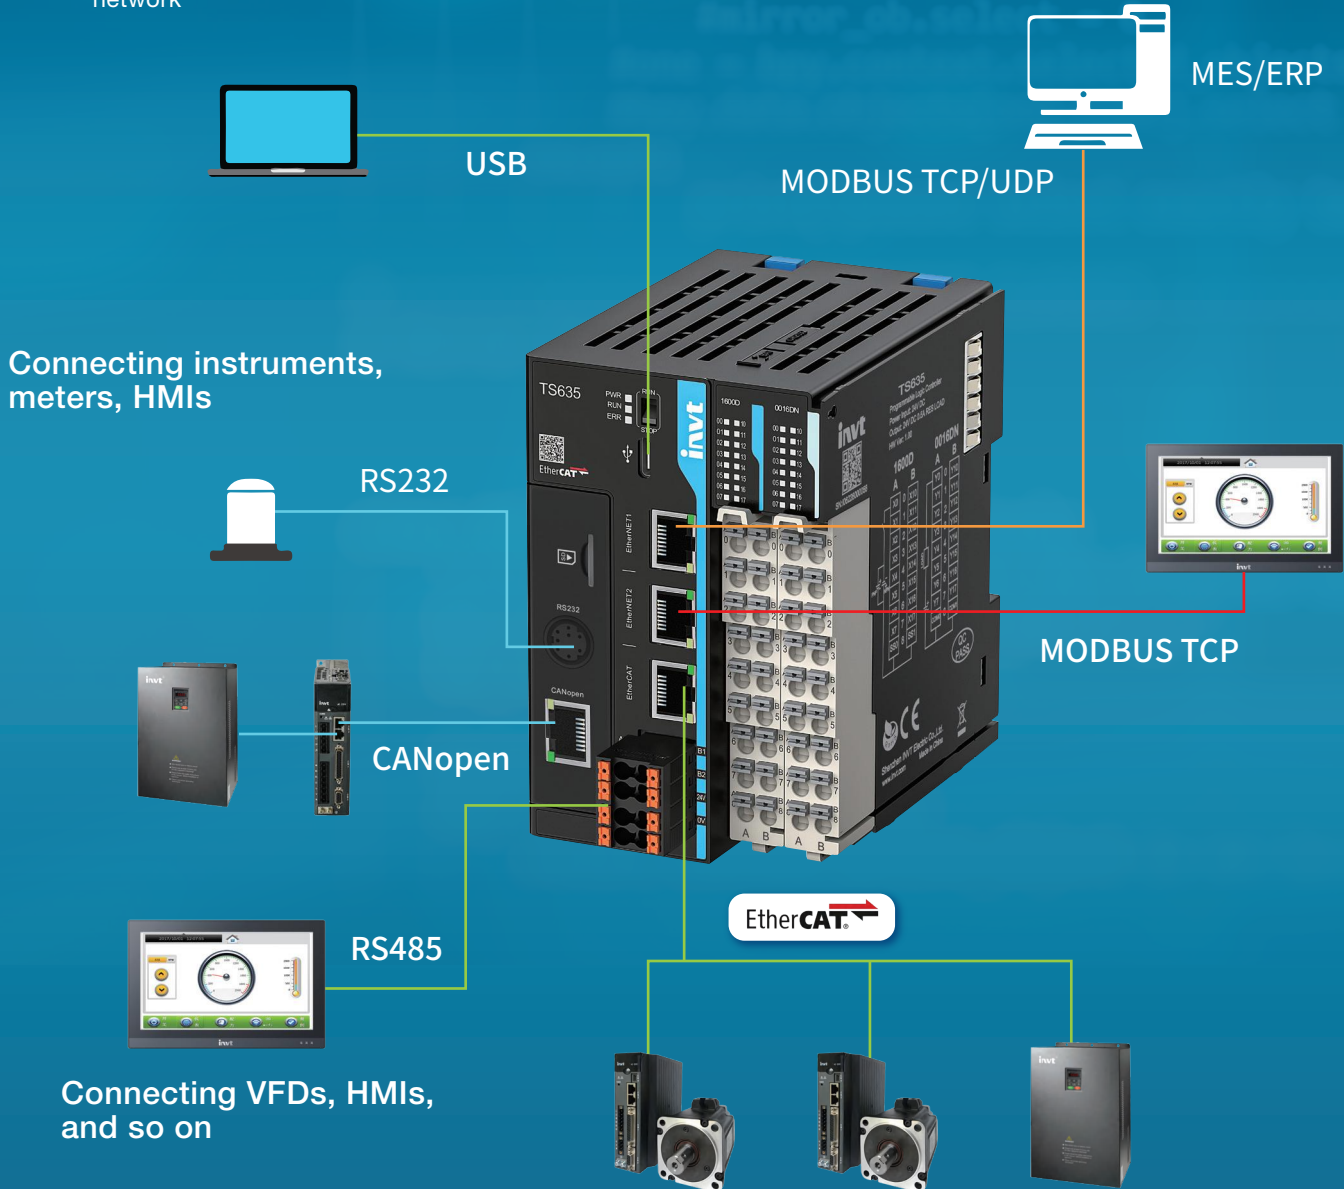


\*Ethernet IP master/slave nodes supported




# Easy programming


Equipped with the brand new **AutoStationPro**

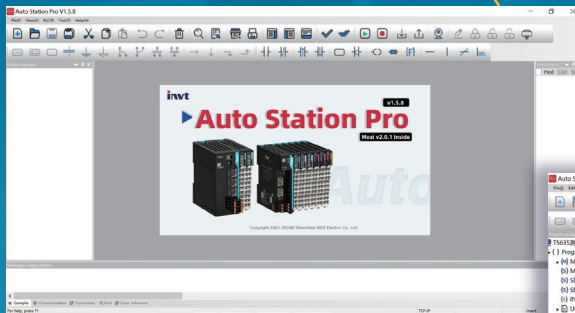



Compliant with IEC61131 programming specifications, supporting the languages LD, SFC, IL, C, and ST (under development). The **pulse** and **bus axes** are compatible with a set of axis control commands.

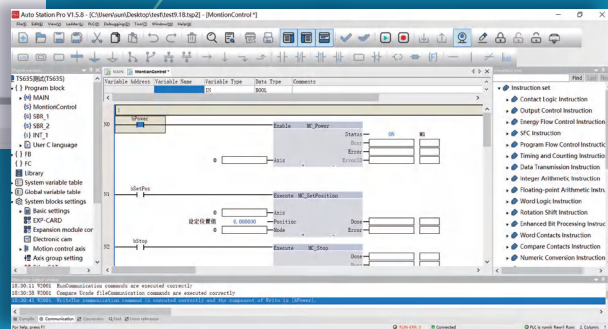

Supporting **user-defined variables**

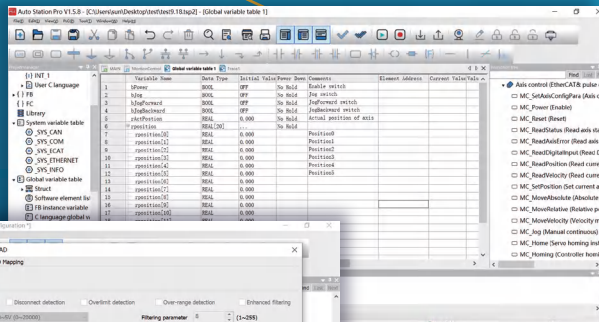

Supporting **graphic configuration** through dragging, Easy parameter setup and automatic address allocation

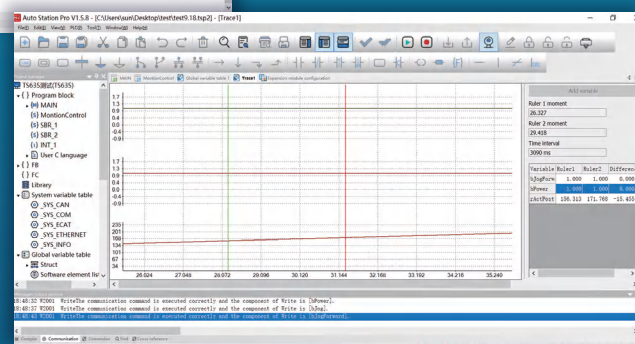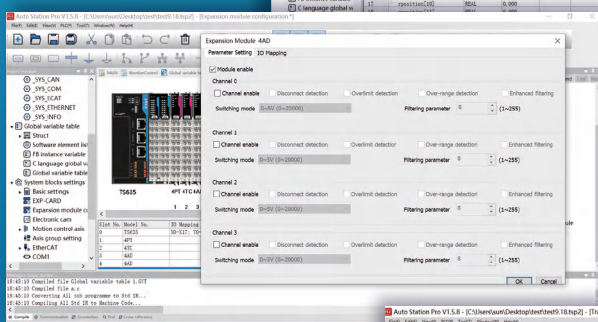

Trace function

# Easy scalability

## Standard configuration of CPU

### 8/16 points of DI

8 channels of 200kHz high-speed inputs


### 8/16 points of DO

Up to 16 channels of 200kHz high-speed outputs

## Compatible with Flex series I/O modules for scaling

Up to **16** I/O modules can be expanded locally  
Use of push-in terminals, facilitating wiring  
Vertical plug-in assembly, with working time reduced by **80%**

Mounting space reduced by more than **60%**, compared with traditional modules

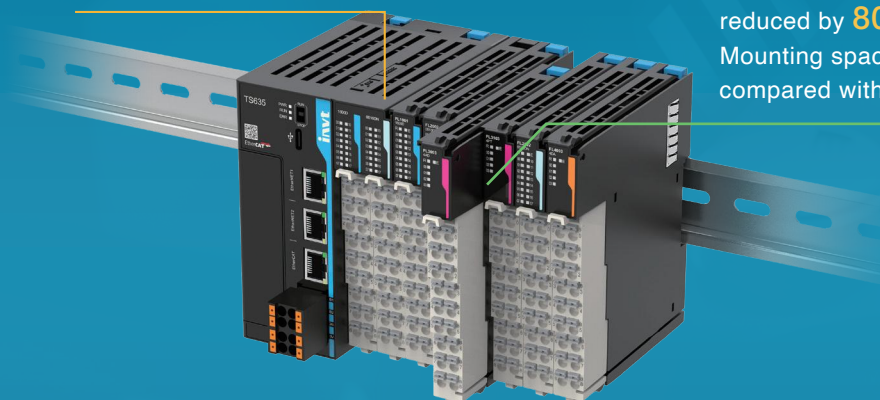

\*TS620 and TS630 equipped with 8 digital inputs and 8 digital outputs; TS611, TS621, and TS621P support 16 channels of 200kHz high-speed outputs

## Supporting various expansion cards

RS232, CANopen

4G

2AD2DA



## Supporting 72 EtherCAT slave nodes



# Cloud collaboration

## Efficient resource utilization in response to digitalization trends

Supporting the **4G**, **WiFi**, and **RJ45** transmission methods, remote upload and download through VPN, and cloud collaboration through MQTT and API



4G、WiFi、RJ45



IWOCLOUD IoT cloud platform

Various data  
presenting  
means

Mature IOT  
applications

Remote O&M

API  
data interface



Mobile  
phone



PC



Large screen



Real-time data  
monitoring



Remote O&M



Third-party IoT platform





# Product specifications

Model	TS635	TS634	TS634P	TS633	TS633P	TS630	TS621	TS621P	TS620	TS620R	TS611
General specifications											
EtherNet interface	2	2	2	2	2	1	2	2	1	1	-
EtherCAT interface	1	1	1	1	1	1	-	-	-	-	-
Max. number of axes (bus+pulse)	32 (bus) +4 (pulse)	16 (bus) +4 (pulse)	16 (bus) +4 (pulse)	8 (bus) +4 (pulse)	8 (bus) +4 (pulse)	8 (bus) +4 (pulse)	8 (pulse)	8 (pulse)	4 (pulse)	-	8 (pulse)
RS485 bus	2 channels, supporting Modbus RTU master/slave function										
EtherNet bus	Supporting Modbus TCP/UDP, program upload and download, and firmware upgrade										-
USB interface	1 channel, Type-C interface, supporting program upload and download, and firmware upgrade										
DI	16 inputs originally, including eight 200kHz high-speed inputs					8 inputs originally, including eight 200kHz high-speed inputs	16 inputs originally, including eight 200kHz high-speed inputs		8 inputs originally, including eight 200kHz high-speed inputs	8 inputs originally, including eight 200kHz high-speed inputs	16 inputs originally, including eight 200kHz high-speed inputs
DO	16 outputs originally, including eight 200kHz high-speed outputs					8 outputs originally, including eight 200kHz high-speed outputs	16 outputs originally, including sixteen 200kHz high-speed outputs		8 outputs originally, including eight 200kHz high-speed outputs	6 outputs originally, Relay outputs	16 outputs originally, including sixteen 200kHz high-speed outputs
Pulse axis	up to 4 axes						up to 8 axes		up to 4 axes	-	up to 8 axes
Input power	24V DC (-15% – +20%)/1A, supporting reversal protection										
Standalone power consumption	<3W										
Backplane bus power supply	5V/2.5A										
Power-down protection	Supported (retention by the internal flash)										
Real-time clock	Supported (CR2032 battery is optional; the real-time clock works about four days without a battery)										
Local expansion modules	Up to 16, disallowing hot swapping										
Local expansion card	1 expansion card, supporting SD card, CANopen card, RS232 card and so on										
Program language	LD, SFC, IL, and C										
Program download	USB port, Ethernet port, SD card (expansion card), and remote download (expansion card)										
Program data capacity	200K steps of user program 2MByte user-defined variables, in which 128KByte support power-down retention About 150K soft elements, the soft elements numbered after 1000 support power-down retention										
Command speed (step)	20K steps at 0.2ms										
Bit handling command	0.0127μs										
Word transmission command	0.0014μs										
Floating-point transmission command	0.0027μs										
Four operations of math	0.033μs										
Power specifications											
Terminal input power rated voltage	24V DC										
Terminal input power rated current	1A										
24V input power protection	Protection against reverse connection and surges										
Hot swapping of module	Not supported										



Model	TS635	TS634	TS634P	TS633	TS633P	TS630	TS621	TS621P	TS620	TS620R	TS611
Input specifications											
Input type	digital input										
Number of input channels	16					8	16		8		16
Input mode	Source and sink										
Input voltage class	24VDC(-10%~+10%)										
Input current	Typical value for X0~X7: 13.5mA; Typical value for X10~X17: 4.2mA					Typical value for X0~X7: 17.5mA	Typical value for X0~X7: 13.5mA; Typical value for X10~X17: 4.2mA		Typical value for X0~X7: 17.5mA	Typical value for X0~X7: 13.5mA; Typical value for X10~X17: 4.2mA	
Max. input frequency	200kHz for X0~X7; 200Hz for X10~X17					200kHz for X0~X7	200kHz for X0~X7; 200Hz for X10~X17		200kHz for X0~X7		200kHz for X0~X7; 200Hz for X10~X17
Input resistance	Typical value for X0~X7: 1.7kΩ; Typical value for X10~X17: 5.7kΩ					Typical value for X0~X7: 1.3kΩ	Typical value for X0~X7: 1.7kΩ; Typical value for X10~X17: 5.7kΩ		Typical value for X0~X7: 1.3kΩ	Typical value for X0~X7: 1.7kΩ; Typical value for X10~X17: 5.7kΩ	
ON voltage	≥ 15VDC										
OFF voltage	≤ 5VDC										
Isolation method	Capacitive isolation										
Common terminal method	8 channels/group										
Input action display	When the input is in the driving state, the input indicator is on (software control)										
Output specifications											
Output type	Transistor output										
Number of output channels	16					8	16		8	-	16
Output mode	sink	Source	sink	Source		sink	sink	Source	sink	-	sink
Output voltage class	24VDC(-10%~+10%)										
Output load (resistive)	0.5A/point, 2A/group										
output load (inductive)	7.2W/point, 24W/group										
Hardware response time	<2us										
Load current requirement	Load current ≥ 12mA when output frequency is greater than 10kHz										
Max. output frequency	200kHz for resistive load, 0.5Hz for inductive load, and 10Hz for lighting load										
Leakage current at OFF	Below 30μA (24V typical voltage)										
Max. residual voltage at ON	≤ 0.5VDC										
Isolation method	Optocoupler isolation										
Common terminal method	8 channels/group										
Short-circuit protection function	Supported										
External inductive load requirement	Flyback diode needed for external inductive load connection										
Output action display	When the output is valid, the output indicator is on (software control)										
Output derating	The current at each common terminal group cannot exceed 1A at ambient temperature of 55℃										
TS620R Output specifications											
Output type	Relay output										
Output mode	Dry node										
Number of output channels	6										
Output voltage class	250VAC/30VDC										
Maximum switching voltage	250VAC/125VDC (@0.3A)										
Output load (resistive load)	3A/point, 8A/module										
Output load (Inductive load)	1A/point, 4A/module										
Output load (lamp load)	30W/point, 120W/module										
contact resistance	<100mΩ (1A 6VDC)										
Minimum load	5VDC 10mA										
Mechanical life	20,000,000 times										
Electrical life	100,000 times										
Isolation method	High voltage/Low voltage isolation										

# Dimension drawings

TS635、TS634、TS634P、TS633、TS633P、TS621、TS621P、TS611

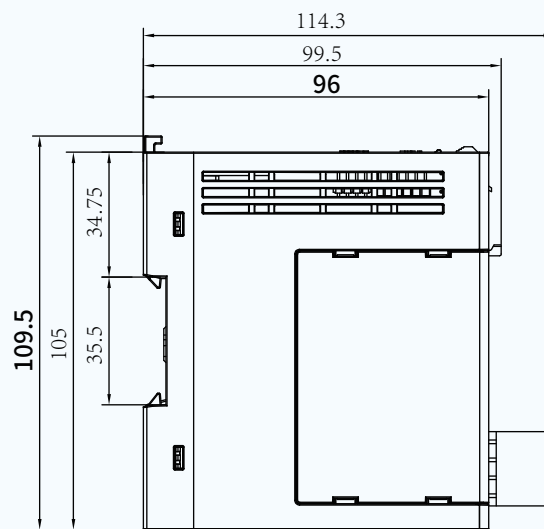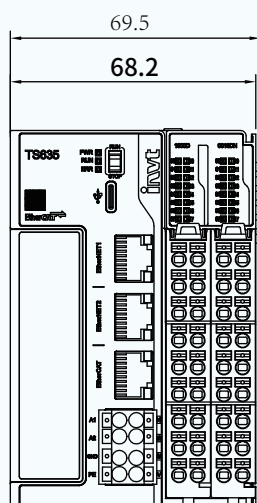



TS630、TS620、TS620R

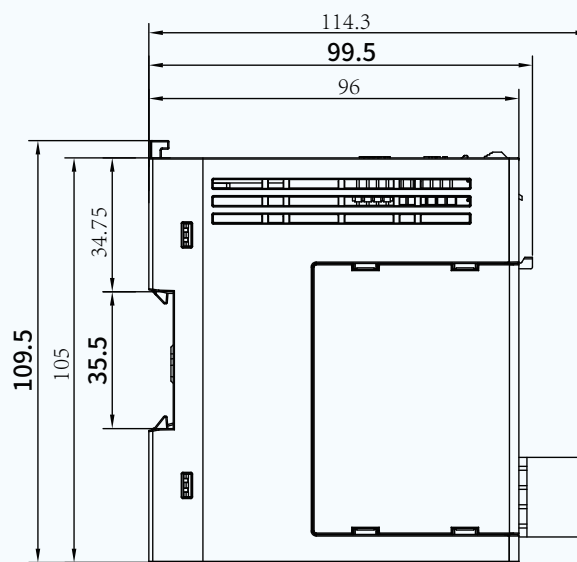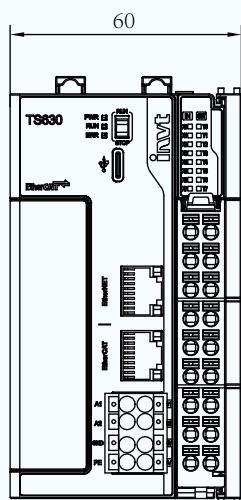




# wiring diagrams


TS611、TS621、TS633、TS634、TS635

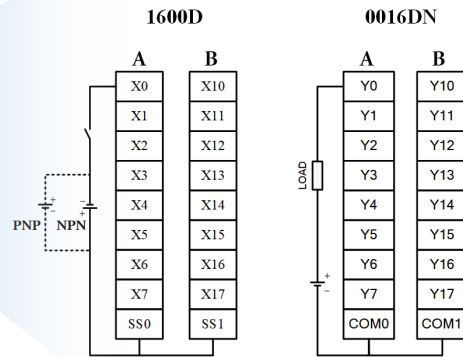


TS620、TS630

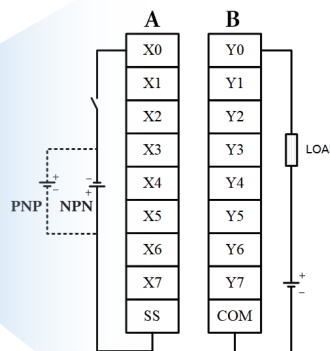


TS620R

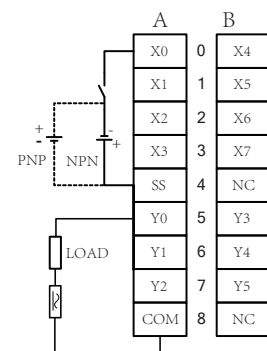

TS621P、TS633P、TS634P

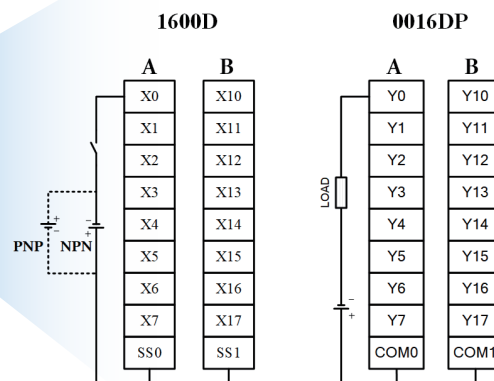

# Expansion card specifications

Model	TS-CAN-232
Product picture	
Product description	TS600 series expansion card, which supports Micro SD cards, CANopen bus, and one channel of RS232 communication
IP rating	IP20
Working temperature	-20°C~55°C
Terminal resistor	Built-in terminal resistor, which can be selected through the dial switch
RS232	1
CAN communication baud rate	1Mbps: Distance<20m 500Kbps: Distance<80m 250Kbps: Distance<150m 125Kbps: Distance<300m 100Kbps: Distance<500m 50Kbps: Distance<1000m
SD card capacity	Up to 32GB
SD card specifications	Micro SD
SD card communication interface	SDIO
Hot swapping	Supported by SD cards, but not supported by the expansion card

## Ordering catalog

Material code	Model	Specifications	Certification
11060-00315	TS611	16 inputs and 16 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, sixteen 200K outputs, up to 8 axes (pulse)	CE
11060-00328	TS620	8 inputs and 8 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 1xEtherNet, up to 4 axes (pulse)	CE
11060-00331	TS620R	8 inputs and 6 relay outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, 1×EtherNet	CE
11060-00323	TS621P	16 inputs and 16 transistor (PNP) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, sixteen 200K outputs, 2xEtherNet, up to 8 axes (pulse)	CE
11060-00318	TS621	16 inputs and 16 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, sixteen 200K outputs, 2xEtherNet, up to 8 axes (pulse)	CE
11060-00329	TS630	8 inputs and 8 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 1xEtherNet, 1xEtherCAT, up to 12 axes (8 bus axes +4pulse axes)	CE

Material code	Model	Specifications	Certification
11060-00324	TS633P	16 inputs and 16 transistor (PNP) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 2xEtherNet,1xEtherCAT,up to 12 axes (8 bus axes +4pulse axes)	CE
11060-00317	TS633	16 inputs and 16 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 2xEtherNet,1xEtherCAT,up to 12 axes (8 bus axes +4pulse axes)	CE
11060-00325	TS634P	16 inputs and 16 transistor (PNP) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 2xEtherNet,1xEtherCAT,up to 20 axes (16 bus axes +4pulse axes)	CE
11060-00316	TS634	16 inputs and 16 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 2xEtherNet,1xEtherCAT,up to 20 axes (16 bus axes +4pulse axes)	CE
11060-00312	TS635	16 inputs and 16 transistor (NPN) outputs, 1×USB (Type-C), 2×RS485, eight 200K inputs, eight 200K outputs, 2xEtherNet,1xEtherCAT,up to 36 axes (32 bus axes +4pulse axes)	CE
11060-00313	TS-CAN-232	TS600 series expansion card TS-CAN-232, which supports Micro SD cards, CANopen bus, and one channel of RS232 communication	CE



*Your trusted industry automation solution provider*



E-mail: [overseas@invt.com.cn](mailto:overseas@invt.com.cn) Website: [www.invt.com](http://www.invt.com)

SHENZHEN INVT ELECTRIC CO.,LTD.

INVT Guangming Technology Building, Songbai Road, Matian, Guangming District, Shenzhen, China

- Industrial Automation:**
- HMI
  - PLC
  - VFD
  - Servo System
  - Elevator Intelligent Control System
  - Rail Transit Traction System
- Electric Power:**
- UPS
  - DCIM
  - Solar Inverter
  - New Energy Vehicle Powertrain System
  - New Energy Vehicle Charging System
  - New Energy Vehicle Motor

INVT Copyright.  
Information may be subject to change without notice during product improving.

66003-00306 20250730(V1.2)