



版本 Edition	变更内容 Description of the change

正样
2026.03.09
A

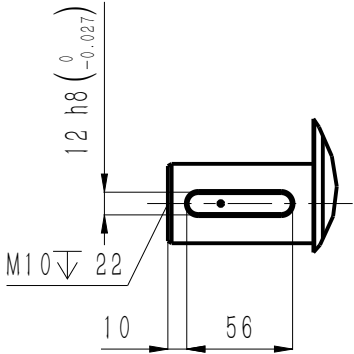


标配：A型圆头普通平键
A12X8X56(GB/T1096)

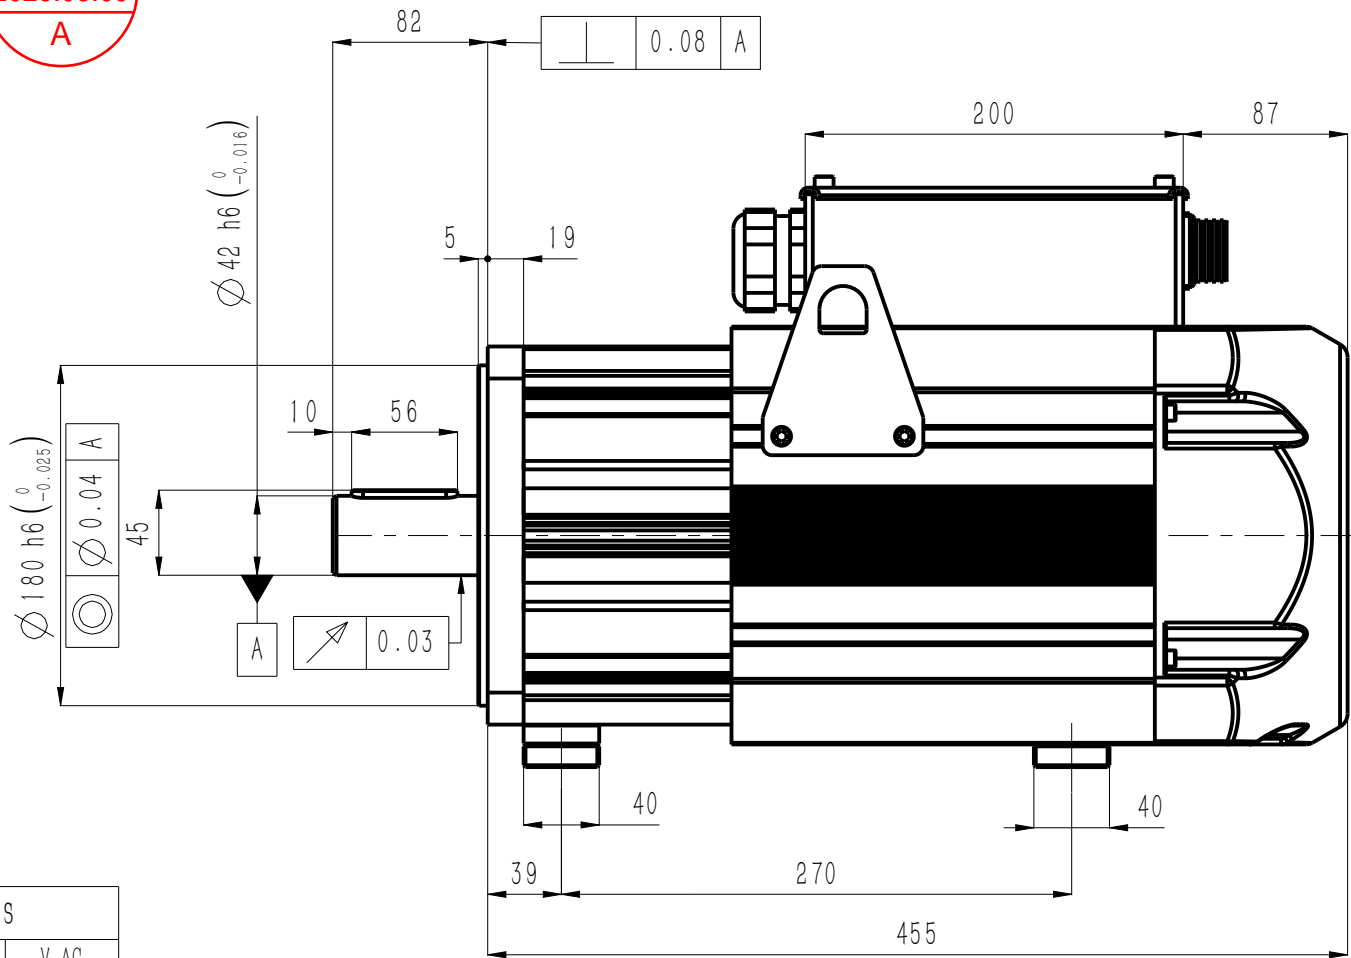

风扇电源PG11防水接头



电源PG36防水接头

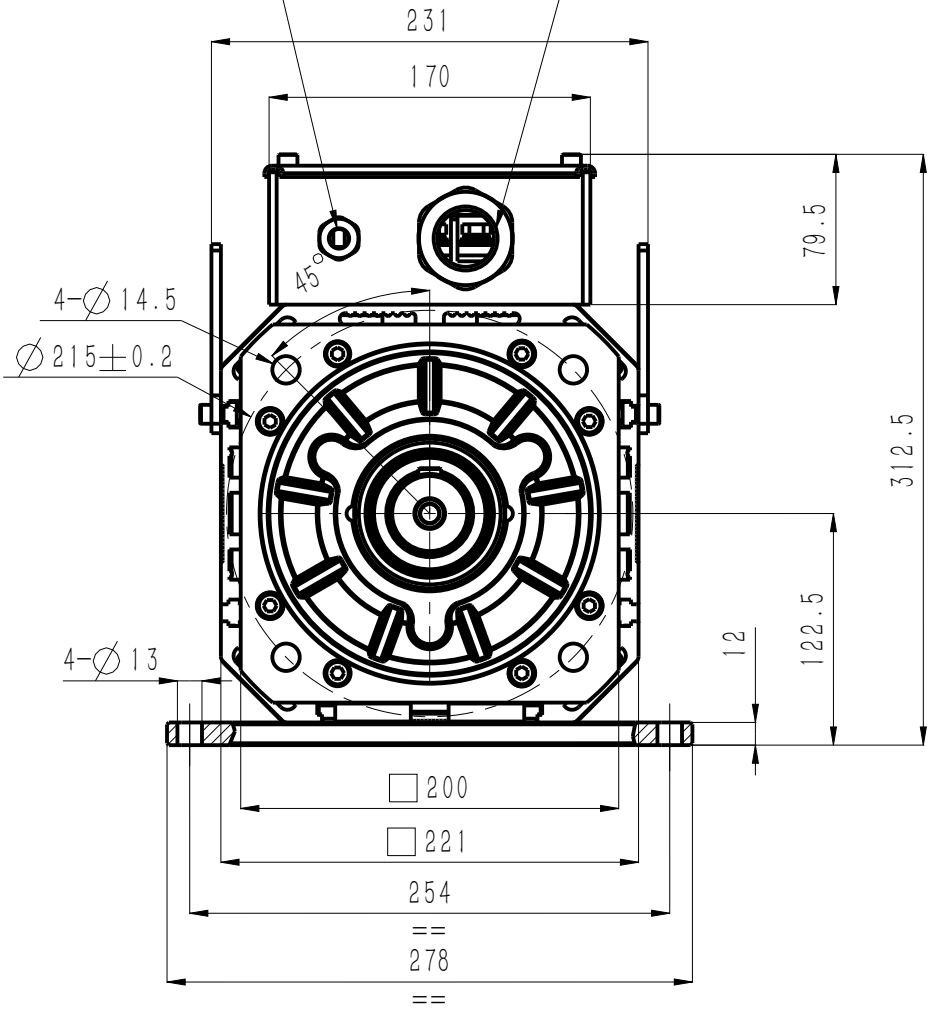

电机技术参数 Motor parameters

额定电压 Rated voltage	380	V AC
额定功率 Rated power	24.1	kW
额定扭矩 Rated torque	115	N · m
额定电流 Rated current	41.7	Arms
峰值扭矩(1000rpm) Peak torque	288	N · m
峰值电流(1000rpm) Peak current	110	Arms
峰值扭矩(2000rpm) Peak torque	261	N · m
峰值电流(2000rpm) Peak current	118	Arms
峰值扭矩(3000rpm) Peak torque	158	N · m
峰值电流(3000rpm) Peak current	89.8	Arms
额定转速 Rated speed	2000	rpm
峰值转速 Maximum speed	3000	rpm
扭矩系数 Torque constant	2.76	N · m / Arms
反电势常数 Back EMF constant	181.9	V / krpm
线电阻 line resistance	0.26	Ω
线电感 line inductance	6.1	mH
转动惯量 Moment of inertia	135 ± 10%	kg · cm ²
轴向允许载荷 Axial allowable load	/	N
径向允许载荷 Radial allowable load	/	N
极对数 Number of pole pairs	4	对


引线定义 Wiring definition

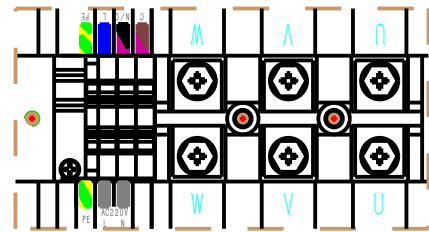

IP 防护等级 Ingress Protection Rating	IP54	
绝缘等级 Insulation class	F	
绝缘电阻 Insulation resistance	>100MΩ DC500V	
电机重量 Motor weight	56.8	kg
工作温度 Operating temperature	-20℃~40℃	
工作湿度 Operating humidity	20%~80% (不结露 Non-dewfall)	
推荐安装海拔 Recommend installing altitude	<1000m(1km以上降额使用) (Derate for use above 1km)	

信号航插规格 Encoder connector

YD28J15Z





编码器规格 Connector specifications

23-bit
optical encoder

12-bit
Resolver encoder

引线定义 Wiring definition										
1	2	3	4	5	6	7	8	9		
PE (屏蔽)	SD+ (蓝)	SD- (黄)	+5V (红)	0V (黑)	BAT+ (棕)	BAT- (白)	KTY84-130+ (黄)	KTY84-130- (绿)		
PE (屏蔽)	Ref+ (红白)	Ref- (黄白)	Cos- (黑)	Cos+ (红)	Sin+ (黄)	Sin- (蓝)	KTY84-130+ (黄)	KTY84-130- (绿)		

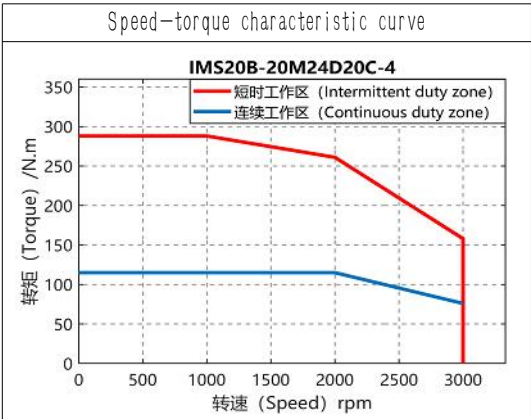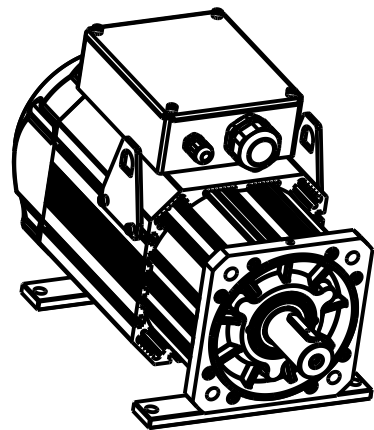

SN	料号 P/N	整机型号 Model and Specification		编码器 Encoder	
	11101-01276	IMS20B-20M24D20C-4-R7F-A		12位旋变	
	11101-01460	IMS20B-20M24D20C-4-P9F-A		23位多圈光编	
				深圳市英威腾电气股份有限公司 Shenzhen INVT Electric Co., Ltd.	
A	新归档	/	26-2-9	名 称	电机外形图 Motor outline dimension drawing
版 本	更改方式	更改人	日期		
设 计	/			料 号	/
校 核	/				
工 艺	/			图 号	投影标识
审 核	/				
标准化	/			第 1 页	共 1 页
批 准	/				