

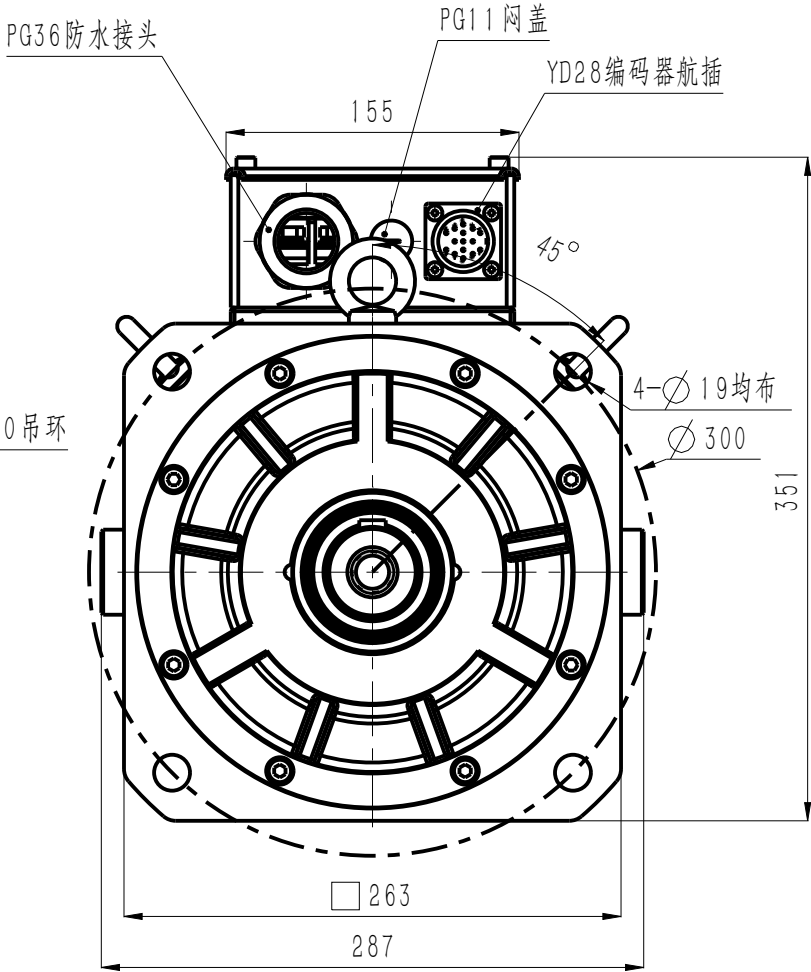


版本 Edition	变更内容 Description of the change
B	电磁参数修改
C	模板更新




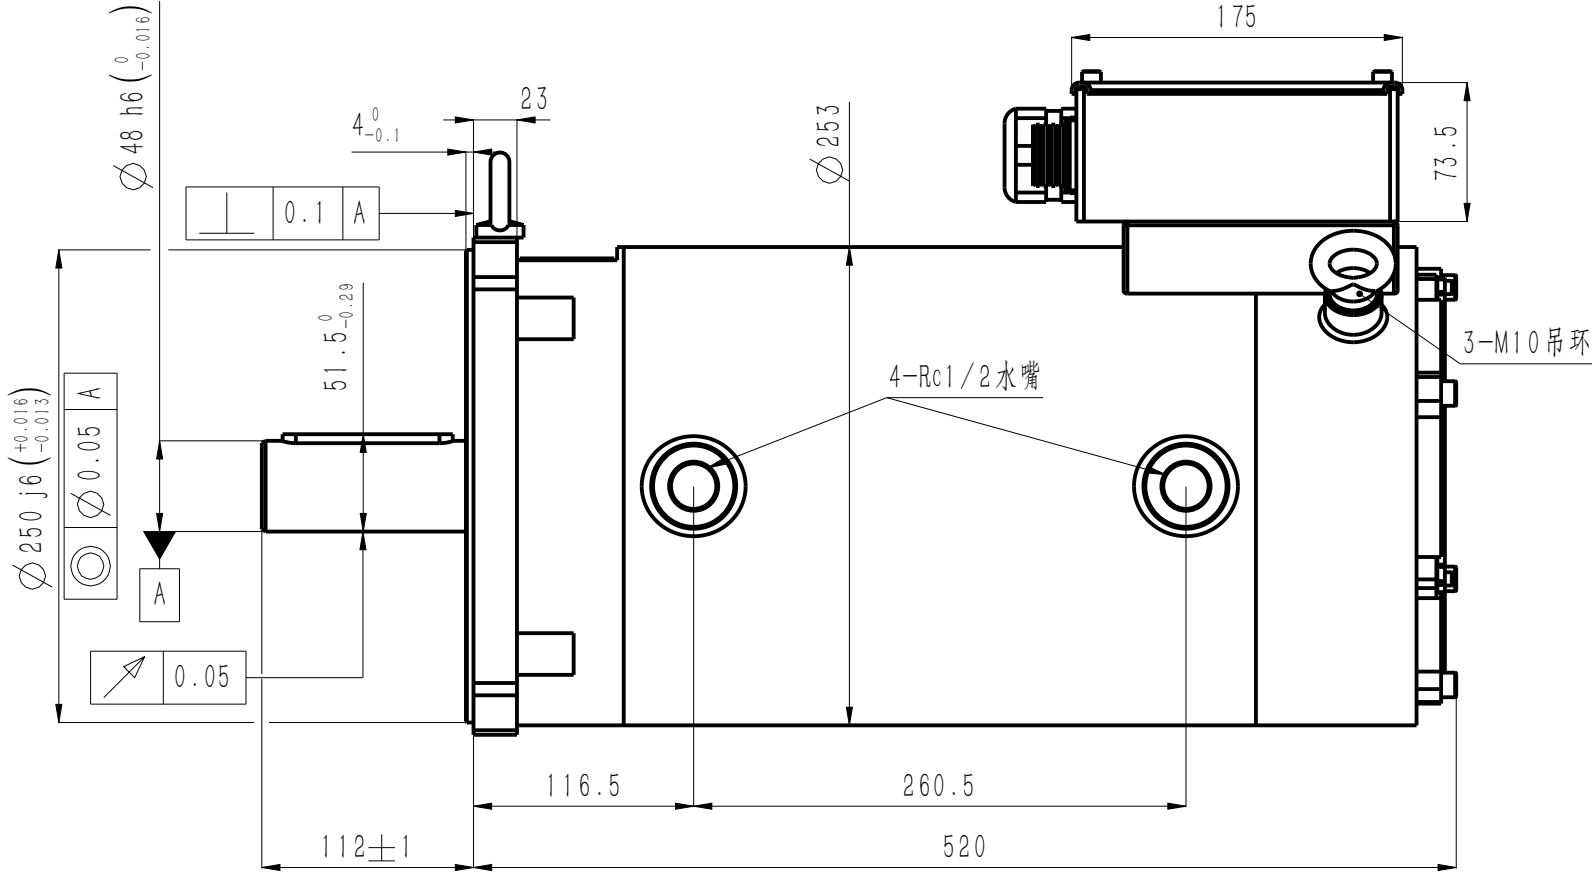


电机技术参数 Motor parameters

额定电压 Rated voltage	380	V AC
额定功率 Rated power	59.7	kW
额定扭矩 Rated torque	285	N · m
额定电流 Rated current	110.9	Arms
峰值扭矩(1000rpm) Peak torque	713	N · m
峰值电流(1000rpm) Peak current	234.2	Arms
峰值扭矩(2000rpm) Peak torque	427	N · m
峰值电流(2000rpm) Peak current	192.4	Arms
峰值扭矩(3000rpm) Peak torque	275	N · m
峰值电流(3000rpm) Peak current	156.3	Arms
额定转速 Rated speed	2000	rpm
峰值转速 Maximum speed	3000	rpm
扭矩系数 Torque constant	2.57	N · m/ Arms
反电势常数 Back EMF constant	210.9	V/krpm
线电阻 line resistance	0.115	Ω
线电感 line inductance	4.36	mH
转动惯量 Moment of inertia	406 \pm 10%	kg · cm ²
轴向允许载荷 Axial allowable load	500	N
径向允许载荷 Radial allowable load	1500	N
极对数 Number of pole pairs	4	对

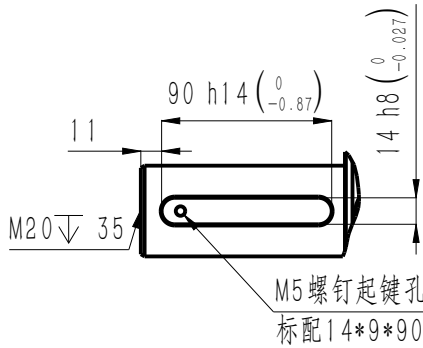


引线定义 Wiring definition

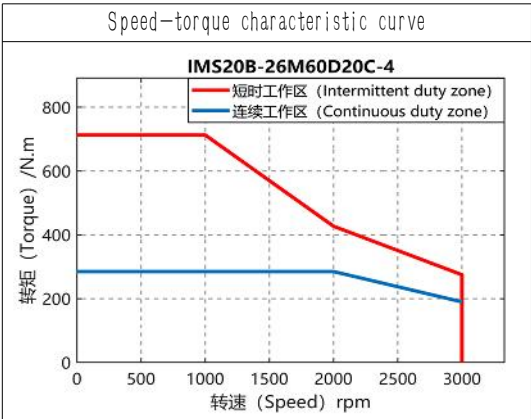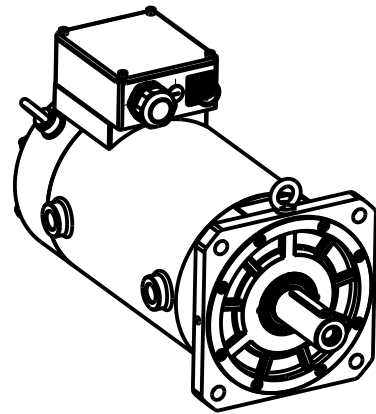

IP 防护等级 Ingress Protection Rating	IP55	
绝缘等级 Insulation class	F	
绝缘电阻 Insulation resistance	>100M Ω DC500V	
电机重量 Motor weight	122	kg
工作温度 Operating temperature	-20℃~40℃	
工作湿度 Operating humidity	20%~80% (不结露 Non-dewfall)	
推荐安装海拔 Recommend installing altitude	<1000m(1km以上降额使用) (Derate for use above 1km)	

信号航插规格 Encoder connector

YD28J15Z



编码器规格 Connector specifications


23位多圈光编
23-bit
optical encoder

12位旋变
12-bit
Resolver encoder

引线定义

Wiring definition

1	2	3	4	5	6	7	8	9
PE (屏蔽)	SD+ (蓝)	SD- (黄)	+5V (红)	0V (黑)	BAT+ (棕)	BAT- (白)	KTY84-130+ (黄)	KTY84-130- (绿)
PE (屏蔽)	Ref+ (红白)	Ref- (黄白)	Cos- (黑)	Cos+ (红)	Sin+ (黄)	Sin- (蓝)	KTY84-130+ (黄)	KTY84-130- (绿)

SN	料号 P/N			整机型号 Model and Specification		编码器 Encoder	
1	11101-01810			IMS20B-26M60D20C-4-R7Y-A		12位旋变	
2	11101-01831			IMS20B-26M60D20C-4-P9Y-A		23位多圈光编	
C	修改	/	2026-2-12	深圳市英威腾电气股份有限公司 Shenzhen INVT Electric Co., Ltd.			
B	修改	/	2026-1-20				
A	新归档	/	2025-12-10				
版本	更改方式	更改人	日期	名称	电机外形图 Motor outline dimension drawing		
设计	/			料号	/	材质	/
校核	/						
工艺	/			图号	/	投影标识	
审核	/						
标准化	/			重量	/	比例	1:1
批准	/					第 1 页 共 1 页	