

RM Series Modular Online UPS

60-600kVA (380V/400V/415V)

RM600/60D series are modular online UPS with brand-new topology, a bidirectional DC-DC converter circuit, which greatly improve the system performance and guarantees high efficiency.

Its compact design ensures the power density, achieve this 600kW system occupies only an area of 0.9m². RM series is considered to be an excellent power supply solution for large data centers and facilities.



Power Module


The cabinet of RM600/60D contains 10 power modules, each of them is 60kVA power capacity in 2U height. With the knob on the front panel, the UPS can achieve hot-swappable without power outage of the load, make it available for redundancy and maintenance online.

- Modular Compact Cabinet Design contains maximum 10 slots.
- Module Status LED Indicator show the status of each power module.
- Bidirectional DC-DC converter circuit achieve 30% charger which greatly improve the system performance.
- Overall efficiency reaches 97%, the collaboration between batteries and power grid improve the UPS utilization significantly.



Bypass Monitoring Module

This series are equipped with the bypass and monitoring module full of intelligent slots, communication interface, battery cold start buttons and adequate dry contacts. With these various ports, it can satisfy users a convenient data transfer service, provide comprehensive monitoring.

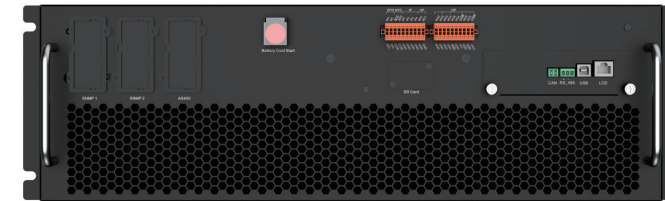

- Diverse communication interface and multiple standard part such as RS485, USB, CAN and programmable dry contacts.
- Convenient CAN communication for software burning and version upgrade after transferring to maintenance mode.
- Isolation between LCD and monitoring board, connect them by network cable, significantly improve the reliability and prevent the damage of the DSP.

Application

All kinds of medium and large data center, network servers, control system, precision instruments and intelligent equipments.

- Financial institution
- Education, office and PC
- Military and government
- Communications
- Medical
- Power supply manufacture



Friendly Interface

Provide graphical and text based information of alarms, status data, and instructions that users can have more friendly display and safer operation.



High Density, Flexible, Artistic

- High power density, 60kW power modules and 2U-high body footprint for 600kVA is 0.88m², power density. 682kW/m², saving great space of data center.
- Flexible capacity expansion and redundancy from 60kVA to 1.8MW, max 30 power modules 3 cabinets in parallel.
 - Ultra-large 10.1 inch color touch LCD display for IoT application and intelligent monitoring.



3 units in parallel



10 inch LCD

Features

- High efficiency, up to 97%
 - Support Lithium battery
 - Intelligent staggering power consumption, become more flexible and save more energy
 - Double side DC-DC topology platform, support charging power reaching 30%
- High power density
 - BMS lithium battery data can be seen on the screen including the temperature and voltage of each cell
 - Friendly interface with 10" touch color LCD with graphic display, intuitive information and easier to operate
 - Modular design, up to 30 power modules in parallel online hot-swappable N+X redundancy

Specification

Model			RM 600/60D		RM 300/60D		
System Capacity			600kVA		300kVA		
Power Module Capacity			60kVA/kW				
Input	Dual Input		Standard				
	Phase		3Phase+Neutral+Ground, 380/400/415VAC (line-line)				
	Rate Frequency		50/60Hz				
	Input Voltage Range		323~478Vac (line-line), full load 323V~138Vac (line-line), load decrease linearly from 100% to 30% according to the min phase voltage				
	Input Frequency Range		40Hz ~ 70Hz				
	Inpput PF		>0.99				
	Input THDi		<3% (100% Linear load)				
	Bypass	Rate Voltage		380/400/415VAC (line-line)			
Rate Frequency		50/60Hz					
Input Voltage Range		Settable, default -20%~+15% Up limit: +10%, +15%, +20%, +25% Down limit: -10%, -15%, -20%, -30%, -40%					
Bypass Frequency Range		Settable, ±1Hz, ±3Hz, ±5Hz					
Bypass Overload		110% for long term operation; 110%~125% for 10 mins; 125%~150% for 1 min; >150% for 200ms					
Output	Rate Voltage		380/400/415VAC (line-line)				
	Rate Frequency		50/60Hz				
	Output PF		1				
	Voltage Regulation		±1%				
	Output THDu		<1% Linear load; <5%, Non-linear load				
	Inverter Overload		<110%, 1hour; 110%~125%, 10mins; 125%~150% for 1min; >150% for 200ms				
	Rate Frequency		50/60Hz				
	Frequency Precision		± 0.1%				
Battery	Voltage		±180~264VDC 30pcs derate to 0.7; 32~34pcs derate to 0.8; 36~38pcs derate to 0.9; 40~44pcs				
	Voltage Precision		1%				
	Charge Power		Up to 30% * Output active power				
System	Efficiency	AC Mode	>97%				
		Battery Mode	>96%				
	Display		LED+Color touch LCD				
	Interface		Standard: RS485, USB, CAN, Programmable Dry Contact Intelligent card slot*2, Extendable dry contact slot				
	Option		SNMP card, AS400 card, Parallel kit, SPD, Dual input kit, LBS				
	Temperature		Operation: 0~40 °C Storage: -40~70 °C				
	Relative Humidity		0~95% Non-condensing				
	Noise(1 meter)		75dB @ 100% load, 70dB @ 45% load				
	Altitude		<1000m. Within 1000m~2000m, 1% power derating for every 100m				
	Application Standard		Safety: IEC/EN 62040-1 EMC: IEC/EN 62040-2 Performance: IEC/EN 62040-3				
	Physical	Dimension (W*D*H,mm)	Cabinet	800*1100*2000		599*1097*1599	
			Power Module	550*750*85			
Weight (kg)		Cabinet	443		201		
		Power Module	35.7				